

DUROTRONIC 800



- Two independent main servo driven film drives
- The web tension is fully adjustable between the main film drives
- Servo motor driven cross seal bar
- Servo motor driven clean cut system
- Touch Screen Display
- Internal memory for the data's of 150 bags
- Short change over time
- Many optional extensions
- High flexibility
- Stacking table






Technical specifications of the DUROTRONIC 800

	Durotronic 800
film type	LDPE, CPP, Coex laminated paper aluminium covered film
film thickness	30 - 100µm // 1.2 – 3.9mil
bag height	300 - 800mm // 11.8 – 31.4"
bag width (draw length)	120 - 500mm // 4.7 – 19.7"
cross seal	10mm or 3 _ 4 _ 3mm 0.4" or 0.11 _ 0.15 _ 0.11"
number of lines	up to 4 lines
speed Durotronic (mechanical)	max. 60m/min // 196ft/min max. 250 cpm

Product range of the Durotronic 800

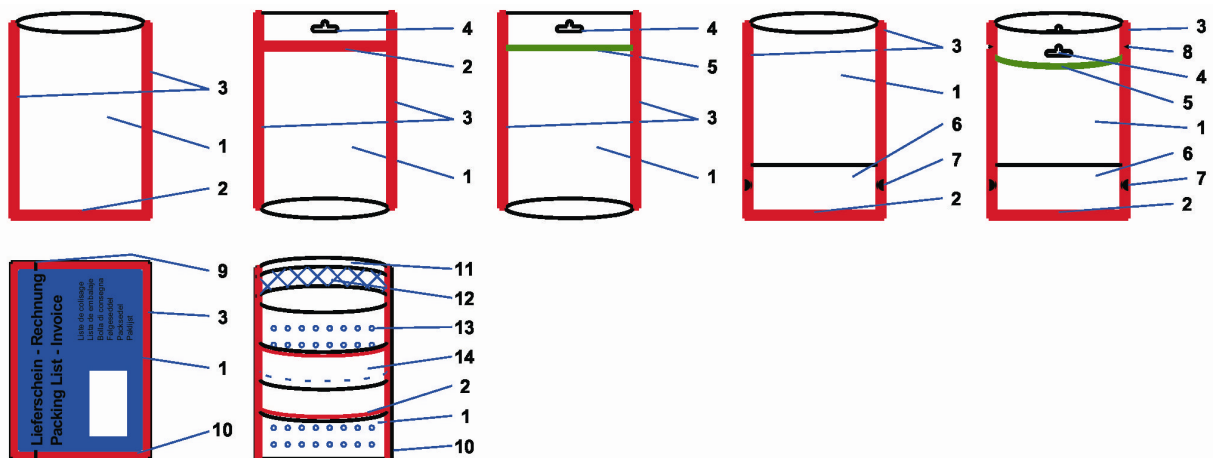

- 1 bag
- 2 linear seal
- 3 cross seal
- 4 euro hole
- 5 zipper
- 6 bottom gusset
- 7 seal punch
- 8 easy open cut
- 9 longitudinal cut
- 10 cross seal
- 11 clap
- 12 tape
- 13 hole punch
- 14 second pocket

Schmidt



Verpackungstechnik