

SERVOTONIC 800 S COMBI




- Two independent main servo driven film drives
- The web tension is fully adjustable between the main film drives
- Servo motor driven seal bar
- Touch Screen Display
- Internal memory for the data's of 150 bags
- Short change over time.
- High flexibility
- Wicket stacker with pin block station and / or stacking table



Technical specifications of the SERVOTRONIC 800 S Combi

	Servotronic 800 S Combi
film type	LDPE, MDPE and Coex
film thickness	30 - 100µm // 1.2 – 3.9mil
total bag height	250 - 800mm // 10.0 – 31.4"
height of lip	50mm // 2.0"
bag width (draw length with wicket stacker)	120 - 450mm // 4.7 – 17.7"
bag width (draw length with stacking table)	150 - 500mm // 5.9 – 20.0"
depth of bottom fold	30 - 80mm // 1.2 – 3.1"
speed Servotronic Combi (mechanical)	max. 60m/min // 196ft/min
speed with soft loop handle (mechanical)	max. 250 cpm
speed with hard handle (mechanical)	max. 150 cpm
speed with patch (mechanical)	max. 100 cpm
speed with patch (mechanical)	max. 160 cpm
speed with handle cut out (mechanical)	max. 200 cpm

Product range of the SERVOTRONIC 800 S Combi

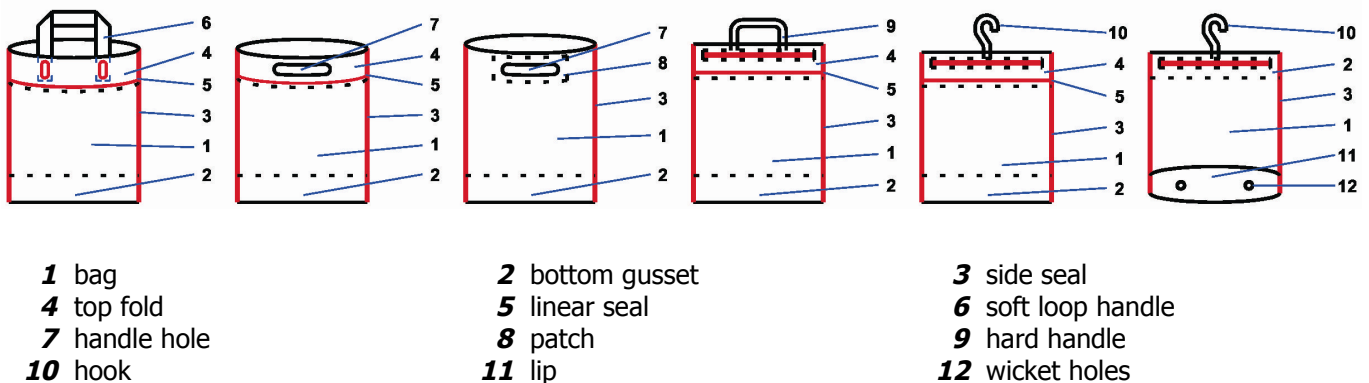

Schmidt



Verpackungstechnik