

SERVOTONIC 800 WICKET




- Two independent main servo driven film drives
- The web tension is fully adjustable between the main film drives
- Servo motor driven seal bar
- Touch Screen Display
- Internal memory for the data's of 150 bags
- Short change over time.
- High flexibility
- 3 stations windmill each with 8 vacuum bar
- Wicket stacker with pin block station



Technical specifications of the SERVOTRONIC 800 S Wicket

	Servotronic 800 S Wicket
film type	LDPE, MDPE and Coex
film thickness	30 - 80µm // 1.2 – 3.1mil
bag height include lip	250 - 800mm // 10.0 – 31.4"
height of lip	50mm // 2.0"
bag width (draw length)	120 - 450mm // 4.7 – 17.7"
depth of bottom fold	30 - 80mm // 1.2 – 3.1"
speed Servotronic Wicket „SERVOTRONIC Wicket“ (mechanical)	max. 60m/min // 196ft/min max. 300 cpm
speed Servotronic Wicket as hygienic bag line „SERVOTRONIC HG“ (mechanical)	max. 60m/min // 196ft/min max. 200 cpm

Product range of the SERVOTRONIC 800 S Wicket and SERVOTRONIC 800 S HG

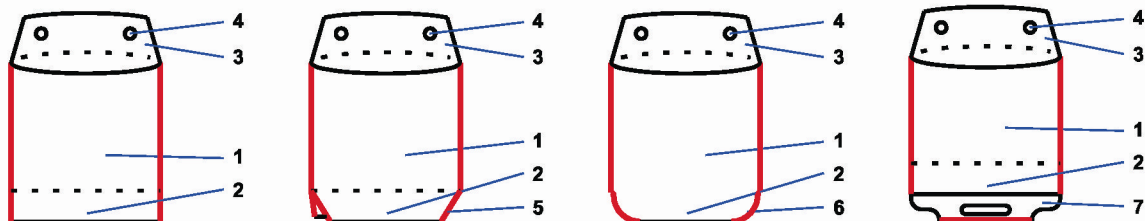

- 1** bag
4 wicket hole
7 special handle for hygienic bags „SERVOTRONIC 800 S HG“
- 2** bottom gusset
5 square bottom

- 3** lip
6 round bottom

Schmidt



Verpackungstechnik